

2025/26  
Collection



Fabrics





**G3-5328**  
Gabriel Step Melange 64013



**G3-5318**  
Gabriel Step Melange 62057




**G3-5313**  
Gabriel Step Melange 68119



**G3-5304**  
Gabriel Step Melange 68120




**G3-5301**  
Gabriel Step Melange 67007




**G3-5311**  
Gabriel Step Melange 67007




**G3-5310**  
Gabriel Step Melange 66018




**G3-5302**  
Gabriel Step Melange 65011



**G3-5316**  
Gabriel Step Melange 60004



**G3-5305**  
Gabriel Step Melange 60011




**G3-5315**  
Gabriel Step Melange 60011



**G3-5319**  
Gabriel Step Melange 61103



**G3-5329**  
Gabriel Step Melange 60090




**G3-5314**  
Gabriel Step Melange 60021




**G3-5300**  
Gabriel Step Melange 60999



**G1-1257**  
Camira Rivet EGL12




**G1-1258**  
Camira Rivet EGL26



**G1-1261**  
Camira Rivet EGL21



**G1-1259**  
Camira Rivet EGL50



**G1-1250**  
Camira Rivet EGL37



**G2-1041**

Gabriel Atlantic 63034



**G2-1047**

Gabriel Atlantic 64089



**G2-1053**

Gabriel Atlantic 65037



**G2-1050**

Gabriel Atlantic 68054




**G2-1060**

Gabriel Atlantic 67030



**G2-1058**

Gabriel Atlantic 66063



**G2-1059**

Gabriel Atlantic 66125




**G2-1042**

Gabriel Atlantic 66041




**G2-1049**

Gabriel Atlantic 66064



**G2-1045**

Gabriel Atlantic 61078



**G2-1057**

Gabriel Atlantic 60061



**G2-1043**

Gabriel Atlantic 60011



**G2-1046**

Gabriel Atlantic 60025



**G2-1040**

Gabriel Atlantic 60999



**G5-7421**

Camira Synergy LDS85



**G5-7420**

Camira Synergy LDS83



**G5-7429**

Camira Synergy LDS28



**G5-7424**

Camira Synergy LDS62



**G5-7423**

Camira Synergy LDS63



**G5-7426**

Camira Synergy LDS21




**G5-7422**

Camira Synergy LDS69




**G5-7425**

Camira Synergy LDS35



**G5-7427**

Camira Synergy LDS17



**G5-7428**

Camira Synergy LDS27



**G2-1221**  
Gabriel Bond 65099



**G2-1225**  
Gabriel Bond 62077



**G2-1223**  
Gabriel Bond 61157




**G2-1220**  
Gabriel Bond 66157




**G2-1222**  
Gabriel Bond 61156



**G2-1224**  
Gabriel Bond 60094




**G2-1226**  
Gabriel Bond 60096



**G2-1227**  
Gabriel Bond 60097




**G1-1142**  
Fidivi Alba 4027




**G1-1144**  
Fidivi Alba 7013




**G1-1143**  
Fidivi Alba 6080



**G1-1145**  
Fidivi Alba 8078



**G1-1146**  
Fidivi Alba 8003



**G1-1147**  
Fidivi Alba 8033



**G1-1183**  
Fidivi Bondai 4011



**G1-1195**  
Fidivi Bondai 4004



**G1-1197**  
Fidivi Bondai 7048




**G1-1182**  
Fidivi Bondai 6015



**G1-1180**  
Fidivi Bondai 6098



**G1-1196**  
Fidivi Bondai 8078



**G1-1181**  
Fidivi Bondai 8033



**G3-5362**  
Gabriel Felicity 64190



**G3-5361**  
Gabriel Felicity 63088



**G3-5365**  
Gabriel Felicity 67083



**G3-5363**  
Gabriel Felicity 65103



**G3-5360**  
Gabriel Felicity 65102




**G3-5366**  
Gabriel Felicity 61164



**G3-5364**  
Gabriel Felicity 66161




**G3-5367**  
Gabriel Felicity 60107




**G3-5368**  
Gabriel Felicity 60999



**G1-1373**  
Gabriel Tonal 2490-64209




**G1-1374**  
Gabriel Tonal 2490-64210



**G1-1372**  
Gabriel Tonal 2490-60124




**G1-1376**  
Gabriel Tonal 2490-66186



**G1-1375**  
Gabriel Tonal 2490-66185



**G1-1371**  
Gabriel Tonal 2490-60122



**G1-1370**  
Gabriel Tonal 2490-60999



**G3-1357**  
Eurotex Milan 36



**G3-1356**  
Eurotex Milan 605




**G3-1353**  
Eurotex Milan 437



**G3-1354**  
Eurotex Milan 5009



**G3-1355**  
Eurotex Milan 710



**G3-1352**  
Eurotex Milan 120




**G3-1351**  
Eurotex Milan 46




**G3-1350**  
Eurotex Milan 516



**G4-7400**  
Camira Main Line Flax MLF01




**G4-7401**  
Camira Main Line Flax MLF13



**G4-7402**  
Camira Main Line Flax MLF31



**G4-7408**  
Camira Main Line Flax MLF18




**G4-7405**  
Camira Main Line Flax MLF24



**G4-7404**  
Camira Main Line Flax MLF21




**G4-7407**  
Camira Main Line Flax MLF22




**G4-7409**  
Camira Main Line Flax MLF34



**G4-7410**  
Camira Main Line Flax MLF36




**G4-7403**  
Camira Main Line Flax MLF02



**G4-7411**  
Camira Main Line Flax MLF28




**G4-7222**  
Camira 24/7 Flax FYR 02



**G4-7221**  
Camira 24/7 Flax FYR 21



**G4-7220**  
Camira 24/7 Flax FYR 19




**G1-1240**  
Camira Era CSE24




**G1-1242**  
Camira Era CSE06



**G1-1243**  
Camira Era CSE34




**G1-1246**  
Camira Era CSE08




**G1-1244**  
Camira Era CSE38



**G1-1241**  
Camira Era CSE02



**G1-1245**  
Camira Era CSE41



**G1-1247**  
Camira Era CSE44



**G1-1248**  
Camira Era CSE14



**G2-1029**  
Camira Xtreme YS 079



**G2-1107**  
Camira Xtreme YS 102



**G2-1116**  
Camira Xtreme YS 084



**G2-1039**  
Camira Xtreme YS 156




**G2-1082**  
Camira Xtreme YS 082




**G2-1109**  
Camira Xtreme YS 095



**G2-1023**  
Camira Xtreme YS 100



**G2-1115**  
Camira Xtreme YS 145



**G2-1021**  
Camira Xtreme YS 081



**G2-1024**  
Camira Xtreme YS 026



**G2-1020**  
Camira Xtreme YS 009

| <b>Alba</b>      | <b>G1 (Fidivi)</b>                                                                     |
|------------------|----------------------------------------------------------------------------------------|
| Composition      | 100% polyester                                                                         |
| Flammability     | 1 IM (UNI 9175) / BS 7176 / California TB 117 / CRIB 5 (BS 5852 part II) / EN 1021-1&2 |
| Weight           | 450 g/lm                                                                               |
| Width            | 140 cm                                                                                 |
| Pilling          | 5 / 5 (EN ISO 12945-2)                                                                 |
| Light fastness   | 6 / 8 (EN ISO 105-B02)                                                                 |
| Rubbing fastness | 5 / 5, 4–5 / 5 (EN ISO 105x12 (wet, dry))                                              |
| Abrasion         | 100,000 rubs Martindale (EN ISO 12947-2)                                               |
| Environment      | STANDARD 100 by OEKO-TEX®                                                              |

| <b>Atlantic</b>  | <b>G2 (Gabriel)</b>                                                                                                                                                                                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% polyester                                                                                                                                                                                                                                                                                     |
| Flammability     | CA TB 117-2013 / ASTM E 84 Class I / ÖNORM A3800-B1-B3825-Q1 UK / BS EN 1021-1 Cigarette / BS EN 1021-2 Match / DIN EN 13501-1 B-s1,d0 (glued)<br>Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals. |
| Weight           | 530 g/lm                                                                                                                                                                                                                                                                                           |
| Width            | 150 cm                                                                                                                                                                                                                                                                                             |
| Pilling          | 4–5 / 5 (EN ISO 12945-2)                                                                                                                                                                                                                                                                           |
| Light fastness   | 5–7 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                                           |
| Rubbing fastness | 4–5 / 5, 4–5 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                                        |
| Abrasion         | 110,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                                           |
| Environment      | STANDARD 100 by OEKO-TEX®, EU Ecolabel                                                                                                                                                                                                                                                             |

| <b>Bond</b>      | <b>G2 (Gabriel)</b>                                                                                                                                                                                      |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% post-consumer recycled polyester                                                                                                                                                                    |
| Flammability     | BS EN 1021 1&2 Cigarette and Match<br>CA TB 117-2013<br>Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals. |
| Weight           | 530 g/lm                                                                                                                                                                                                 |
| Width            | 140 cm                                                                                                                                                                                                   |
| Pilling          | 5 / 5 (EN ISO 12945-2)                                                                                                                                                                                   |
| Light fastness   | 6–7 / 8 (EN ISO 105-B02)                                                                                                                                                                                 |
| Rubbing fastness | 4–5 / 5, 4–5 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                              |
| Abrasion         | 100,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                 |
| Environment      | STANDARD 100 by OEKO-TEX®, EU Ecolabel                                                                                                                                                                   |

| <b>Bondai</b>    | <b>G1 (Fidivi)</b>                                                                                            |
|------------------|---------------------------------------------------------------------------------------------------------------|
| Composition      | 100% polyester                                                                                                |
| Flammability     | 1 IM (UNI 9175) / BS 7176 / California TB 117 / CRIB 5 (BS 5852 part II) / EN 1021-1&2 / Euroclass EN 13501-1 |
| Weight           | 350 g/lm                                                                                                      |
| Width            | 140 cm                                                                                                        |
| Pilling          | 5 / 5 (EN ISO 12945-2)                                                                                        |
| Light fastness   | 6 / 8 (EN ISO 105-B02)                                                                                        |
| Rubbing fastness | 5 / 5, 5 / 5 (EN ISO 105x12 (wet, dry))                                                                       |
| Abrasion         | 150,000 rubs Martindale (EN ISO 12947-2)                                                                      |
| Environment      | STANDARD 100 by OEKO-TEX®                                                                                     |

| <b>Era</b>       | <b>G1 (Camira)</b>                                                                                                                                                                                                                                                                                                                      |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% polyester, non metallic dyestuffs                                                                                                                                                                                                                                                                                                  |
| Flammability     | EN 1021 – 1&2 (cigarette & match) / BS 7176 Low Hazard<br>EN 13501-1 Adhered Class B, s1, d0 /<br>EN 13501-1 Un-adhered Class C, s1, d0 / BS 5852 Ignition Source 5 with EnviroFlam5 / BS 7176 Medium Hazard with EnviroFlam5 /<br>The Furniture & Furnishing (Fire Safety) Regulations 1988 (UK domestic cig & match) with EnviroFlam5 |
| Weight           | 320 g/lm                                                                                                                                                                                                                                                                                                                                |
| Width            | 140 cm                                                                                                                                                                                                                                                                                                                                  |
| Light fastness   | 5 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                                                                                  |
| Rubbing fastness | 4 / 5, 4 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                                                                                 |
| Abrasion         | ≥ 100,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                                                                              |
| Environment      | STANDARD 100 by OEKO-TEX®, Indoor Advantage Gold                                                                                                                                                                                                                                                                                        |

| <b>Felicity</b>  | <b>G3 (Gabriel)</b>                                                                                                                                                                                                                |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% post-consumer recycled polyester                                                                                                                                                                                              |
| Flammability     | BS EN 1021 1&2 Cigarette and Match<br>BS EN 1021-1 Cigarette<br>CA TB 117-2013<br>Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals. |
| Weight           | 430 g/lm                                                                                                                                                                                                                           |
| Width            | 140 cm                                                                                                                                                                                                                             |
| Pilling          | 5 / 5 (EN ISO 12945-2)                                                                                                                                                                                                             |
| Light fastness   | 5–7 / 8 (EN ISO 105-B02)                                                                                                                                                                                                           |
| Rubbing fastness | 4–5 / 5, 4–5 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                        |
| Abrasion         | 90,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                            |
| Environment      | STANDARD 100 by OEKO-TEX®, EU Ecolabel                                                                                                                                                                                             |


| <b>Main Line Flax</b> | <b>G4 (Camira)</b>                                                                                                                                                                                                                                                                                                                                              |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition           | 75% virgin wool (schurwolle), 25% flax                                                                                                                                                                                                                                                                                                                          |
| Flammability          | EN 1021 – 1&2 (cigarette & match) / BS 7176 Low Hazard<br>BS 5852 Ignition Source 5 / BS 7176 Medium Hazard / NF D 60-013 / ÖNORM B 3825 & A 3800-1 (58kg/m3 CMHR Foam) / UNI 9175 Classe 1 IM /<br>BS 5867-2: Type B Curtains & Drapes / IMO FTP Code (Part 8)<br>The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match) |
| Weight                | 437 g/lm                                                                                                                                                                                                                                                                                                                                                        |
| Width                 | 140 cm                                                                                                                                                                                                                                                                                                                                                          |
| Light fastness        | 5 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                                                                                                          |
| Rubbing fastness      | 3 / 5, 4 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                                                                                                         |
| Abrasion              | ≥ 50,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                                                                                                       |
| Environment           | STANDARD 100 by OEKO-TEX®, Indoor Advantage Gold                                                                                                                                                                                                                                                                                                                |

| <b>Milan</b>     | <b>G3 (Eurotex)</b>                       |
|------------------|-------------------------------------------|
| Composition      | 100% polyester                            |
| Weight           | 675 g/lm                                  |
| Width            | 145 cm                                    |
| Light fastness   | 4,5 / 8 (EN ISO 105-B02)                  |
| Rubbing fastness | 4 / 5, 4–5 / 5 (EN ISO 105x12 (wet, dry)) |
| Abrasion         | ≥ 80,000 rubs Martindale (EN ISO 12947-2) |
| Environment      | STANDARD 100 by OEKO-TEX®                 |

| Rivet            | G1 (Camira)                                                                                                                                                                                                                                                              |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% post-consumer recycled polyester                                                                                                                                                                                                                                    |
| Flammability     | EN 1021 - 1&2 (cigarette & match) / BS 7176 Low Hazard UNI 9175 Classe 1 IM / BS 5852 Ignition Source 5 with EnviroFlam5 / BS 7176 Medium Hazard with EnviroFlam5 / The Furniture & Furnishing (Fire Safety) Regulations 1988 (UK domestic cig & match) with EnviroFlam5 |
| Weight           | 280 g/lm                                                                                                                                                                                                                                                                 |
| Width            | 140 cm                                                                                                                                                                                                                                                                   |
| Light fastness   | 5-6 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                 |
| Rubbing fastness | 4 / 5, 4 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                  |
| Abrasion         | ≥ 80,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                |
| Environment      | EU Ecolabel, Indoor Advantage Gold                                                                                                                                                                                                                                       |

| Step             | G3 (Gabriel)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% trevira cs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Flammability     | BS EN 1021 1&2 Cigarette and Match / BS EN 1021-1 Cigarette / BS 5852 Crib 5 / BS 7176 Medium hazard / DIN 4102 - B1 / NFP 92-503/504/505 M1 / AM 18 - NF D 60-013-(only for fabric) / ÖNORM A3800-B1-B3825-Q1 UK / FAR/JAR 25.853 (a) (i) (ii) / DIN EN 13501-1 B-s1,d0 / Class Uno UNI 9175 Class 1 I EMME / CA TB 117-2013 / IMO MSC 307(88) Annex 1 part 8 / MED Certificate IMO / IMO MSC 307(88) Annex 1 part 8 UK / MED Certificate IMO UK<br>Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. |
| Weight           | 470 g/lm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Width            | 140 cm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Light fastness   | 5-7 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Rubbing fastness | 4-5 / 5, 4-5 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Abrasion         | 100,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Environment      | STANDARD 100 by OEKO-TEX®, EU Ecolabel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

| Step Melange     | G3 (Gabriel)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% trevira cs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Flammability     | DIN 4102 - B1 / NFP 92-503/504/505 M1 / BS EN 1021 1&2 Cigarette and Match / BS EN 1021-1 Cigarette / BS 5852 Crib 5 / ÖNORM A3800-B1-B3825-Q1 UK / FAR/JAR 25.853 (a) (i) (ii) / AM 18 - NF D 60-013-(only for fabric) / CA TB 117-2013 / Class Uno UNI 9175 Class 1 I EMME / DIN EN 13501-1 B-s1,d0 / IMO MSC 307(88) Annex 1 part 8 / MED Certificate IMO / IMO MSC 307(88) Annex 1 part 8 UK / MED Certificate IMO UK<br>Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. |
| Weight           | 470 g/lm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Width            | 140 cm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Light fastness   | 5-7 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Rubbing fastness | 4-5 / 5, 4-5 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Abrasion         | 100,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Environment      | STANDARD 100 by OEKO-TEX®, EU Ecolabel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

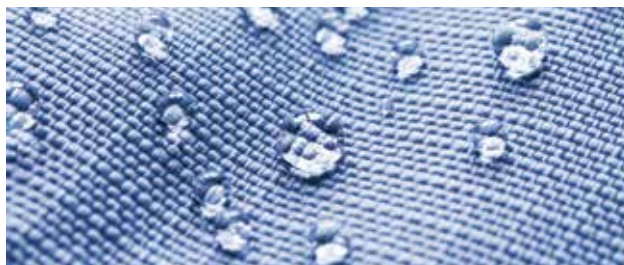

All upholstery materials in our collection can be treated with Nano protection.

| Synergy          | G5 (Camira)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 95% virgin wool (schurwolle), 5% polyamide                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Flammability     | EN 1021 - 1&2 (cigarette & match) / BS 7176 Low Hazard NF D 60-013 / ÖNORM B 3825 & A 3800-1 (58 kg/m3 CMHR Foam) / UNI 9175 Classe 1 IM / EN 13501-1 Adhered Class D, s1, d0 / IMO FTP Code (Part 8) / The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match) / BS 5852 Ignition Source 5 when FR treated / BS 7176 Medium Hazard when FR treated / EN 13501-1 Adhered Class B, s1, d0 when FR treated / EN 13501-1 Un-adhered Class D, s2, d0 when FR treated |
| Weight           | 400 g/lm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Width            | 140 cm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Light fastness   | 5 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Rubbing fastness | 4 / 5, 4 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Abrasion         | ≥ 100,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Environment      | EU Ecolabel, Indoor Advantage Gold                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

| Tonal            | G1 (Gabriel)                                                                                                                                                                                                                                                                        |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% post-consumer recycled polyester                                                                                                                                                                                                                                               |
| Flammability     | CA TB 117-2013 / ASTM E 84 Class I / BS EN 1021 1&2 Cigarette and Match / BS 476 Part 7 class I / DIN EN 13501-1 B-s1,d0(glued)<br>Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals. |
| Weight           | 315 g/lm                                                                                                                                                                                                                                                                            |
| Width            | 140 cm                                                                                                                                                                                                                                                                              |
| Pilling          | 4-5 / 5 (EN ISO 12945-2)                                                                                                                                                                                                                                                            |
| Light fastness   | 6-8 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                            |
| Rubbing fastness | 4-5 / 5, 4-5 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                         |
| Abrasion         | 100,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                            |
| Environment      | STANDARD 100 by OEKO-TEX® / EU Ecolabel                                                                                                                                                                                                                                             |

| Xtreme           | G2 (Camira)                                                                                                                                                                                                                                                                                                      |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 100% post-consumer recycled polyester                                                                                                                                                                                                                                                                            |
| Flammability     | EN 1021 - 1&2 (cigarette & match) / BS 7176 Low Hazard BS 5852 Ignition Source 5 / BS 7176 Medium Hazard DIN 4102 B1 / NF D 60-013<br>ÖNORM B 3825 & A 3800-1 (over 58 kg/m3 CMHR foam) / UNI 9175 Classe 1 IM / BS 476 Part 7 Class 1 (Adhered)<br>Flame retardant performance is dependent upon the foam used. |
| Weight           | 310 g/lm                                                                                                                                                                                                                                                                                                         |
| Width            | 140 cm                                                                                                                                                                                                                                                                                                           |
| Light fastness   | 6 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                                                                                           |
| Rubbing fastness | 4 / 5, 4 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                                                                                          |
| Abrasion         | ≥ 100,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                                                                                       |
| Environment      | STANDARD 100 by OEKO-TEX®, EU Ecolabel, Indoor Advantage Gold                                                                                                                                                                                                                                                    |

| 24/7 Flax        | G4 (Camira)                                                                                                                                                                                                                                 |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition      | 54% polyamide, 35% virgin wool (schurwolle), 11% flax                                                                                                                                                                                       |
| Flammability     | EN 1021 – 1 (Cigarette), EN 1021 - 2 (Match), BS 7176 Low Hazard BS 5852 Ignition Source 5, BS 7176 Medium Hazard, NF D 60-013, UNI 9175 Classe 1 IM, IMO FTP Code (Part 8)<br>Flame retardant performance is dependent upon the foam used. |
| Weight           | 390 g/lm                                                                                                                                                                                                                                    |
| Width            | 140 cm                                                                                                                                                                                                                                      |
| Light fastness   | 5 / 8 (EN ISO 105-B02)                                                                                                                                                                                                                      |
| Rubbing fastness | 4 / 5, 4 / 5 (EN ISO 105x12 (wet, dry))                                                                                                                                                                                                     |
| Abrasion         | ≥ 200,000 rubs Martindale (EN ISO 12947-2)                                                                                                                                                                                                  |



**Viasit Bürositzmöbel GmbH**  
**Boxbergweg 4**  
**D-66538 Neunkirchen**

**Viasit International Ltd.**  
**1–5 Clerkenwell Road**  
**London EC1M 5PA**  
**United Kingdom**

**[www.viasit.com](http://www.viasit.com)**  
**[info@viasit.com](mailto:info@viasit.com)**

